REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

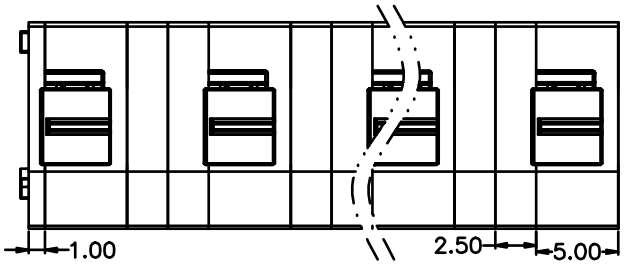

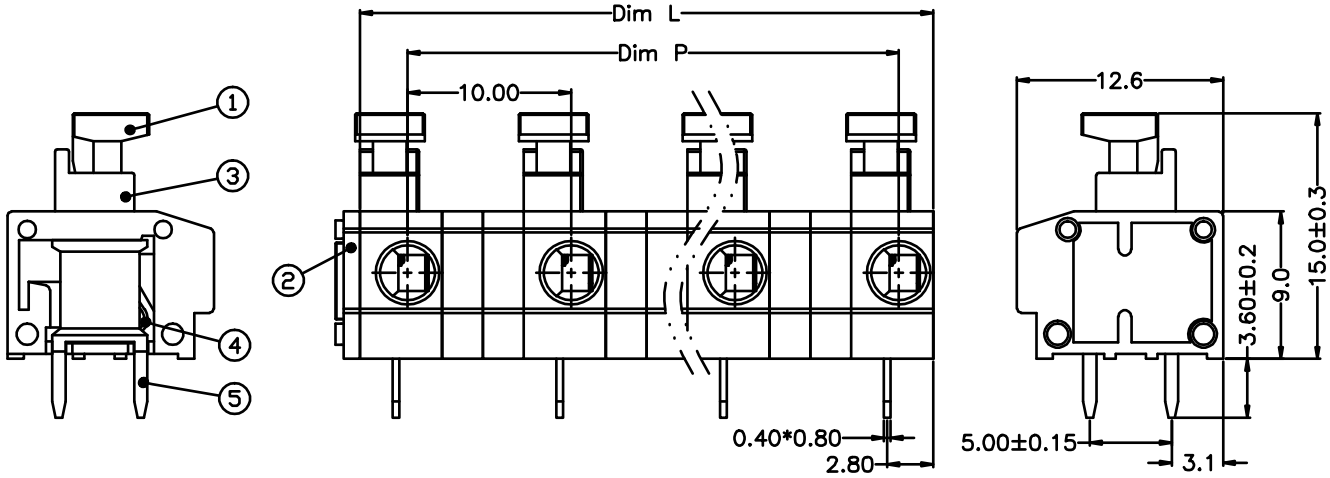

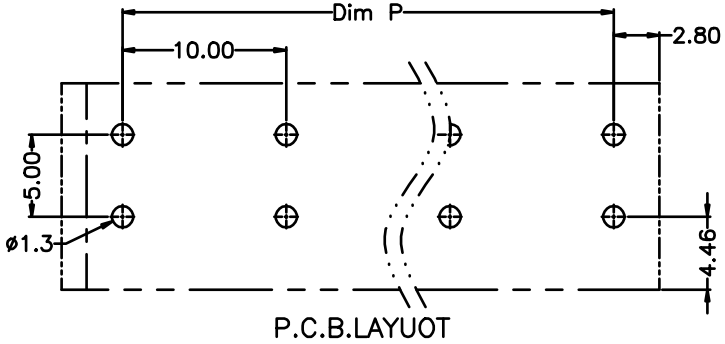

- Material
  ①Button : PA66, UL94V-0
  ②Cover : PA66, UL94V-0
  ③Housing : PA66, UL94V-0
  ④Reed : Stainless steel
  ⑤Pin header : Brass, Tin plated

- Electrical

	UL	IEC
Rated voltage :	300V	750V
Rated current :	5A	15A

  Insulation resistance: 500MΩ/DC500V
  Withstanding Voltage : AC2000V/1min
  Wire range: 20-18AWG 1.5mm²

- Mechanical
  Operating temperature:-40℃~+105℃
  Soldering temperature:250℃±5/5sec
  Strip length: 8-9mm

N=Number of Poles
Dim P=(N-1)x10.00
Dim L=Nx10.00-5

Poles \ Dim	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

HOW TO ORDER
KF124B-10.0-XXP-1 X-XXXXX
- KF124B: MODEL
- 10.0: Pitch:mm
- XXP: No.of poles: 2~24P
- 1: 1:Single Pitch 2:Double Pitch
- X: Color: G:Green R:Red K:Black W:White O:Orange B:Blue GR:Gray
- XXXXX: Customer Request

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X°.	±5°
.X	±0.3	.X°	±3°
.XX	±0.1	.XX°	±1°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION		TITLE	KF124B-10.0-XXP
UNITS	mm		
SHEET SIZE	A4	SERIES	KF124B

慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.LTD